


| Art.- No. | Bemessungswerte/Ratings/Valeurs assignées | | | Spannungsfall Voltage drop Chute de tension max [mV] | Verlustleistung Sustained dissip. Valeur de dissip. max [W] | Schmelzintegral Melting integral Intégral de fusion [A ² s] |
|--------------|---|--------------------------------|--|---|--|---|
| | Strom Current Courant | Spannung Voltage Tension | Ausschaltvermögen Breaking capacity Pouvoir de coupure | | | |
| 522.502 | 32 mA | 250 V | 35 A | 5.000 | 1,6 | 0,004362 |
| 522.503 | 40 mA | | | 0,008320 | | |
| 522.504 | 50 mA | | | 0,011150 | | |
| 522.505 | 63 mA | | | 0,022703 | | |
| 522.506 | 80 mA | | | 0,033024 | | |
| 522.507 | 100 mA | | | 0,054400 | | |
| 522.508 | 125 mA | | | 0,046875 | | |
| 522.509 | 160 mA | | | 0,097765 | | |
| 522.510 | 200 mA | | | 0,11 | | |
| 522.511 | 250 mA | | | 0,41 | | |
| 522.512 | 315 mA | | | 0,33 | | |
| 522.513 | 400 mA | | | 0,54 | | |
| 522.514 | 500 mA | | | 1,94 | | |
| 522.515 | 630 mA | | | 1,16 | | |
| 522.516 | 800 mA | | | 3,02 | | |
| 522.517 | 1 A | | | 6,26 | | |
| 522.518 | 1,25 A | | | 12,75 | | |
| 522.519 | 1,6 A | | | 22,02 | | |
| 522.520 | 2 A | | | 33,52 | | |
| 522.521 | 2,5 A | | | 63,75 | | |
| 522.522 | 3,15 A | | | 93,87 | | |
| 522.523 | 4 A | | | 170,24 | | |
| 522.524 | 5 A | | | 92,00 | | |
| 522.525 | 6,3 A | | | 146,06 | | |
| 522.526 | 8 A | | | 125 V | | 80 A |
| 522.527 | 10 A | | 100 A | 100 | | 462,00 |

Aufbau: Glasrohr, durchsichtig
Kontaktkappen: Messing, vernickelt
Verpackung: 100 St. = 10 x 10 Faltschachteln
1000 St. = Industrieverpackung

Construction: Glasstube, transparent
Contact caps: Brass, nickel plated
Packing: 100 pcs. = 10 boxes of 10 pieces
1000 pcs. = Industrial boxes

Construction: Tube verre, transparent
Cabochons de contact: Laiton, nickelé
Emballage: 100 pcs. = en 10 boîtes de 10 pièces
1000 pcs. = en emballage industriel

Strom-Zeit-Kennlinien
Current Time Characteristics
Caractéristique courant/temps

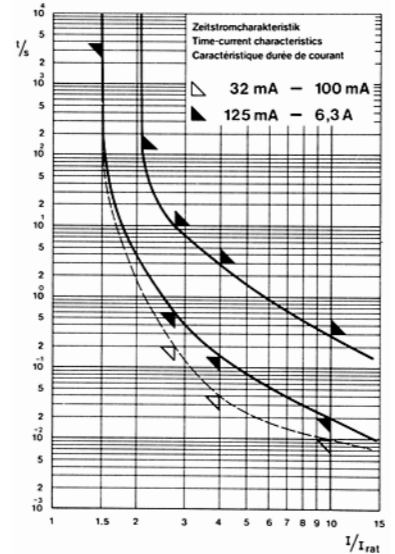

Schmelzzeit-Grenzwerte / Pre-arcing time limits / Temps de fusion limité

| Bemessungsstrom Rated current Courant assigné | 2,1 I _{rat} | | 2,75 I _{rat} | | 4 I _{rat} | | 10 I _{rat} | |
|---|----------------------|--|-----------------------|------|--------------------|------|---------------------|--------|
| | max. | | min. | max. | min. | max. | min. | max. |
| 32 - 100 mA | 2 min | | 300 ms | 10 s | 40 ms | 3 s | 10 ms | 300 ms |
| 125 mA - 10 A | 2 min | | 600 ms | 10 s | 150 ms | 3 s | 20 ms | 300 ms |

1) auf Anfrage / on request / à demande

2) 630 mA - 6,3 A